

Safety Shields

For Sanitary “Wash Down” Locations Protects Employees from “HOT” Pipes

PIPE GUARD FEATURES


- ◆ 304 Stainless Steel perforated metal
- ◆ Nylon insulator spacers (300 Deg F)
- ◆ Install or remove in seconds
- ◆ Can be cleaned with harsh chemicals

OPTIONS

Standard lengths, 24” and 48” (Custom lengths available)
Fits pipe and tubing 1” through 4” (Other sizes optional)
PTFE (450 deg Temp) Insulator spacers (Special Order)

HOSE STATION GUARD FEATURES

- ◆ Fits standard Strahman Mix Valve
- ◆ Installs in minutes on existing brackets
- ◆ 304 Stainless Steel perforated metal
- ◆ 7 GA Hose Rack support
- ◆ Positions hose rack away from hot pipes

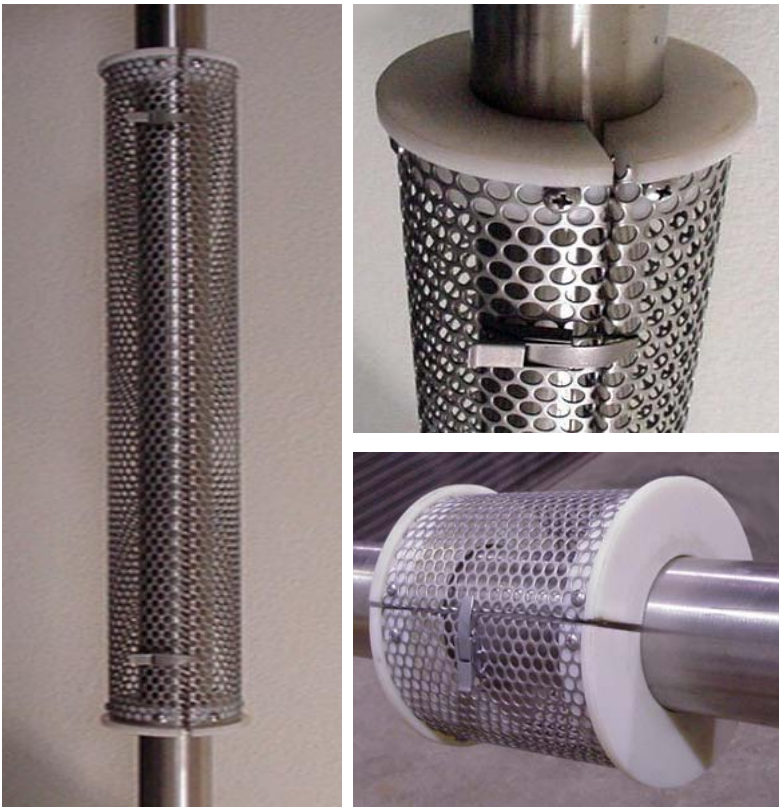

Stainless Steel Ltd.

QUALITY CRAFTSMANSHIP - YOUR PLANT or OURS